


BA 651/751/851

Outstanding combination of modern design and high performance



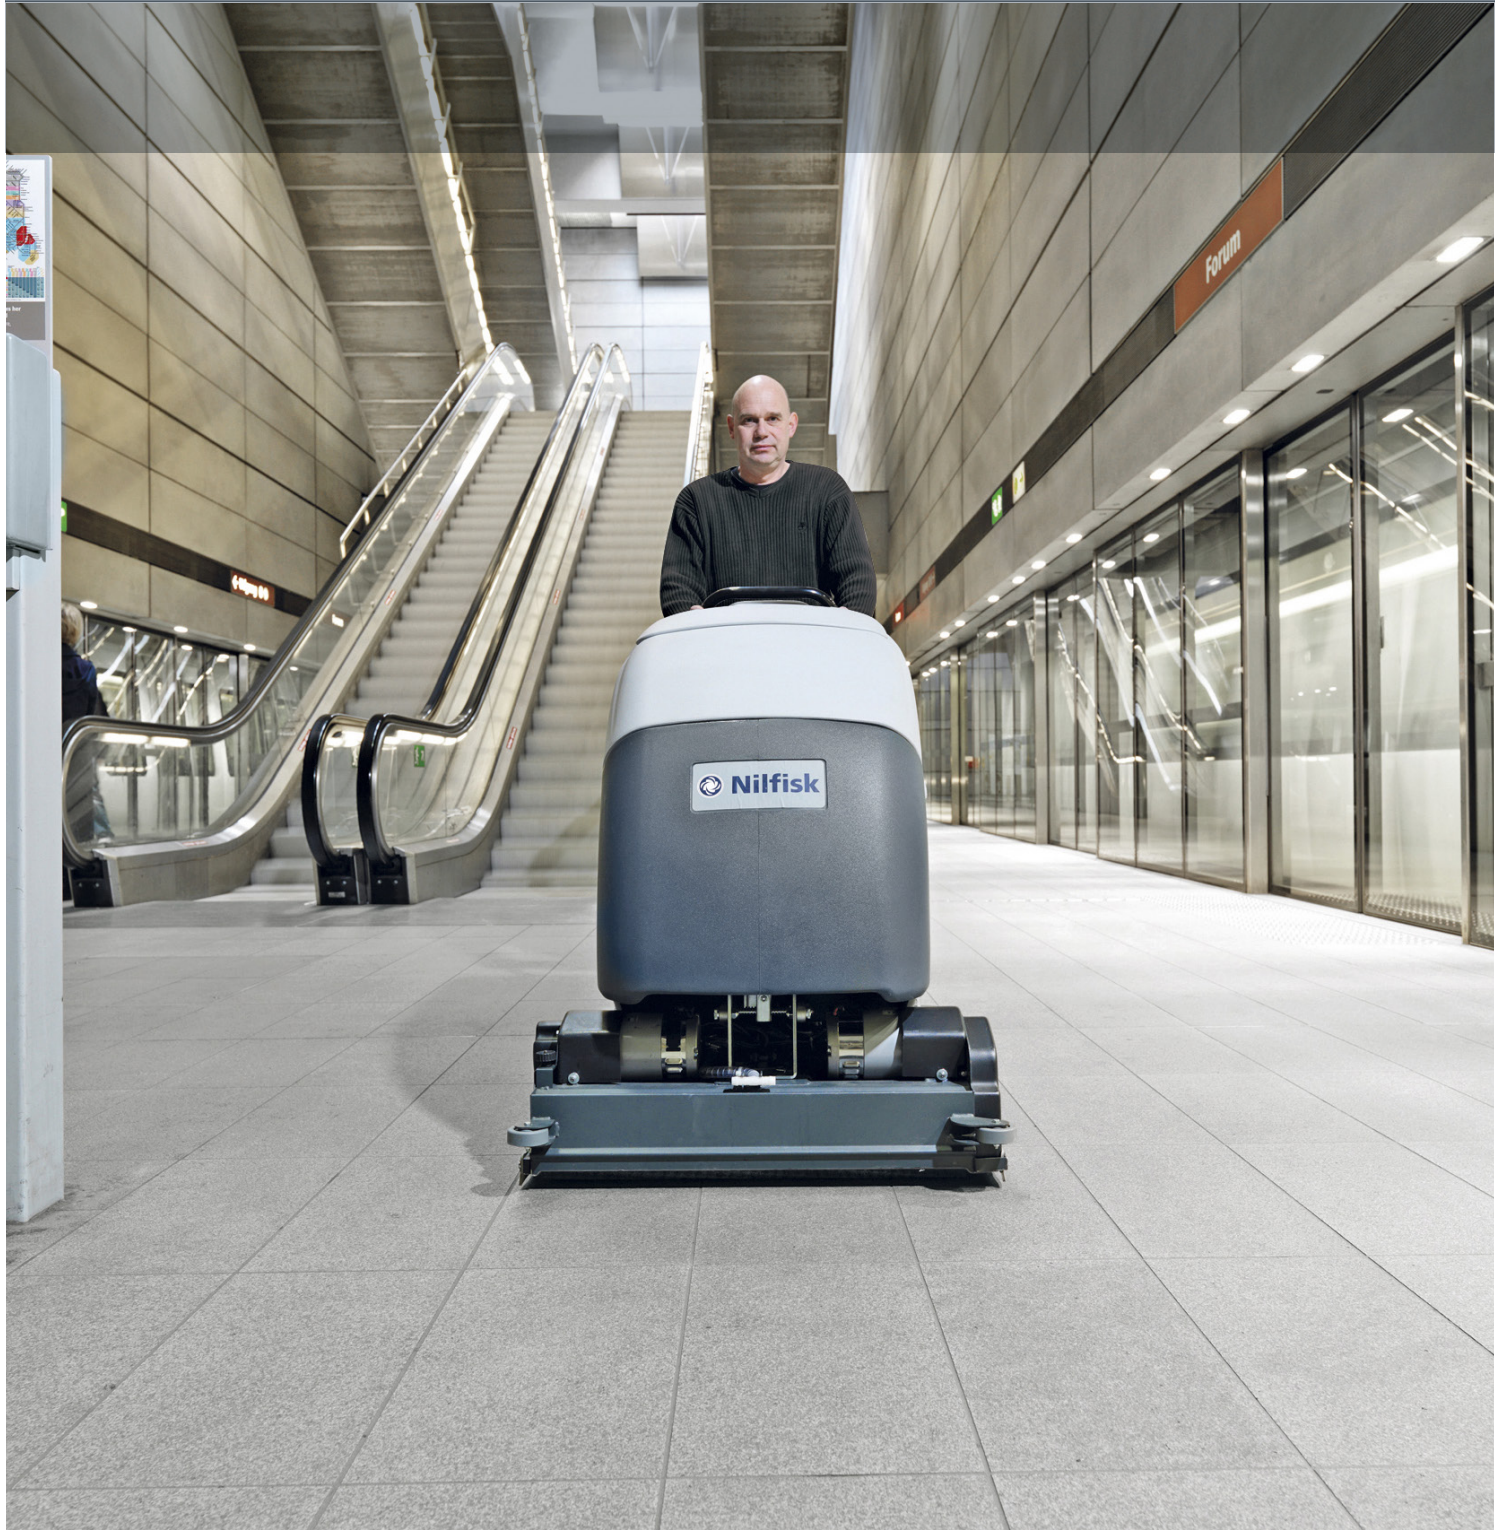

Green meets clean

Whatever the job demands, Nilfisk Ecoflex makes getting it done easier. Just push the button for a good green clean - low-flow water and no detergent-mode is ideal for routine cleaning. Simply push the button again to increase performance, adding just enough detergent for dirtier floors. Choose between 5 different levels. There is the Temporary 60 second power cleaning boost functionality for extra dirty patches.



A generation of scrubber/dryers

Completely renewed control panel,
intuitive and extremely easy to use

More versatility, up to 30% greater productivity, better than ever reliability, extremely silent operation, and the most advanced ergonomics available.

These are some of the reasons why the BA 651/751 series represents a generation of scrubber dryers, and real added value for cleaning professionals.

Furthermore all the machines are now equipped with the Ecoflex system, which controls consumption and allows the operator to boost temporarily water, detergent and brush pressure for all the more aggressive cleaning tasks.

Never before has there been such an outstanding combination of modern ergonomic design, high performance and superb traction. This is the complete walk-behind unit for large area cleaning.

- Extremely low noise level (down to 58 dB(A)) makes daytime cleaning viable
- Superb manoeuvrability allows the machine to turn around in a 200 cm wide aisle
- Powerful traction and easy handling makes cleaning faster and easier
- Combination of 86 cm scrubbing width, 5.6 km/h speed, and large capacity tanks provide better-than-ever productivity
- Sturdy construction, state-of-the art design and better materials offer more reliability and longer working life
- Interchangeable brush decks allow a choice of 2 different disc sizes 66cm / 71cm or 71 cm cylindrical
- One touch control panel for easy and safe operation



The exceptional Ecoflex system allows the operator to match the floor cleaning machine's performance to the soil on the floor. Sometimes an extra effort is required for deep restorative cleaning or unexpected challenges. With one press of a button the Ecoflex's "burst of power" temporarily maximises the brush pressure, water and detergent for a single powerful cleaning boost. If the job is done in less than 60 seconds, just push the button again and return to eco-cleaning mode.

ecoflex™



Reliability is also our mantra when it comes to service

A Nilfisk machine functions optimally when cared for by regular service and maintenance visits. Therefore we have created the optimal service solution: three levels of service reflecting different requirements and an optional supply of a substitute machine in critical situations.

Service Solutions Standard – Professional maintenance

Your contract encompasses two yearly maintenance visits and 48 hours response time. Breakdown visits and spare parts are billed separately.

Service Solutions Plus – Optimised performance

With the Plus solution you have a firm grip on your maintenance and repair costs while knowing that your performance is never compromised, only optimised.

Service Solutions Premium – Maximised uptime

If uptime is your absolute top priority and key concern, Service Solutions Premium is the best choice. A quarterly maintenance visit is included, and there are no sudden financial surprises.

- One touch control panel for easy and safe operation and adjustable handle suits tall or short operators
- Big area squeegee for excellent moisture pickup is light and easy to clean
- Squeegee protected by large poly' bumpers
- Ecoflex system: minimum consumption, maximum performance



- ← Recovery tank tilts to give access to battery or detergent cartridge without emptying solution tank
- ← Side filling port far from electronics and motors, for convenience and safety
- ← Adjustable scrubbing pressure ensures good results on all surfaces

Technical specifications

Description	Unit	BA 651	BA 751	BA 751C
Item no.		9087242020	9087243020	9087246020
Voltage	V	24	24	24
Rated power	W	1420	1420	1820
Sound pressure level at 1.5m	dB(A)	58	58	58
Productivity rate theoretical/ actual	m ² /h	3700/2200	3980/2390	3980/2390
Scrubbing width	mm	660	710	710
Max speed	km/h	5.6	5.6	5.6
Solution/recovery tank	litre	85/85	85/85	85/85
Brush/pad diameter	mm	2x330/330	2x355/355	2x690
Brush pressure	kg	32/52	32/52	35
Brush speed	rpm	220	220	613
Squeegee width	mm	890	890	890
Length x width x height	cm	150x60x105	150x60x105	147x60x105
Weight	kg	170	170	170
Operating weight	kg	470	470	470

Specifications and details are subject to change without prior notice.

Nilfisk Ltd.

Nilfisk House · Bowerbank Way · Gilwilly Industrial Estate · Penrith · Cumbria · CA11 9BQ
 Tel.: 01768 868995 (UK) · 01 2943838 (IE)
 Email: mail.uk@nilfisk.com (UK) · info.ie@nilfisk.com (IE)
 www.nilfisk.co.uk · www.nilfisk.ie

